
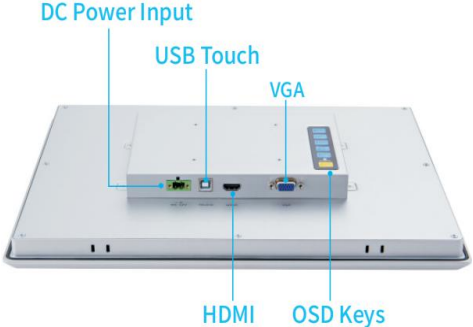


|                     |                                                                                   |                                                                                    |
|---------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Photo</b>        |  |  |
| <b>LCD Display</b>  | Display Type                                                                      | 17" TFT-LCD                                                                        |
|                     | Resolution                                                                        | 1280*1024                                                                          |
|                     | Brightness                                                                        | 250 cd/m <sup>2</sup>                                                              |
|                     | Viewing Angle                                                                     | -85~85° (H), -85~85° (V)                                                           |
|                     | Backlight                                                                         | LED                                                                                |
|                     | Backlight Life MTBF (hrs))                                                        | 30000 Hours                                                                        |
|                     | Max color                                                                         | 262K                                                                               |
|                     | Contrast Ratio                                                                    | 800:1                                                                              |
| <b>Touch Screen</b> | Touch Panel                                                                       | Five wire Resistive touch(Capacitive touch optional)                               |
|                     | Connection Port                                                                   | USB 2.0                                                                            |
|                     | Light transmittance                                                               | > 85%                                                                              |
|                     | Click Life time                                                                   | 250 g Pressure, 10 Million times                                                   |
| <b>Mechanical</b>   | Color                                                                             | Grey                                                                               |
|                     | Display Connection                                                                | VGA, HDMI                                                                          |
|                     | Size                                                                              | 412.7 x 333.8 x 45 mm                                                              |
|                     | Opening Hole size                                                                 | 400.1x321.5mm                                                                      |
|                     | Mounting                                                                          | Embedded Mounting/ Vesa Mounting                                                   |
|                     | Weight (kg)                                                                       | NA                                                                                 |
| <b>Environment</b>  | Operational Temperature                                                           | -10 ~ 60° C                                                                        |
|                     | Storage Temperature                                                               | -20 ~ 70° C                                                                        |
|                     | Relative Humidity                                                                 | 95% @ 40° C (non-condensing)                                                       |
|                     | IP rate                                                                           | Front panel IP65                                                                   |
|                     | Anti-Vibration                                                                    | 1.5Grms@5~500Hz, random, 1 hr/axis                                                 |
|                     | Anti-Shock                                                                        | 10g acceleration, 11ms duration                                                    |
| <b>Accessories</b>  | USB Cable 1.5 meters                                                              |                                                                                    |
|                     | HDMI cable 1.5 meters                                                             |                                                                                    |
|                     | Mounting brackets(embedded mounting)                                              |                                                                                    |
|                     | Vesa mounting optional                                                            |                                                                                    |

单位: mm



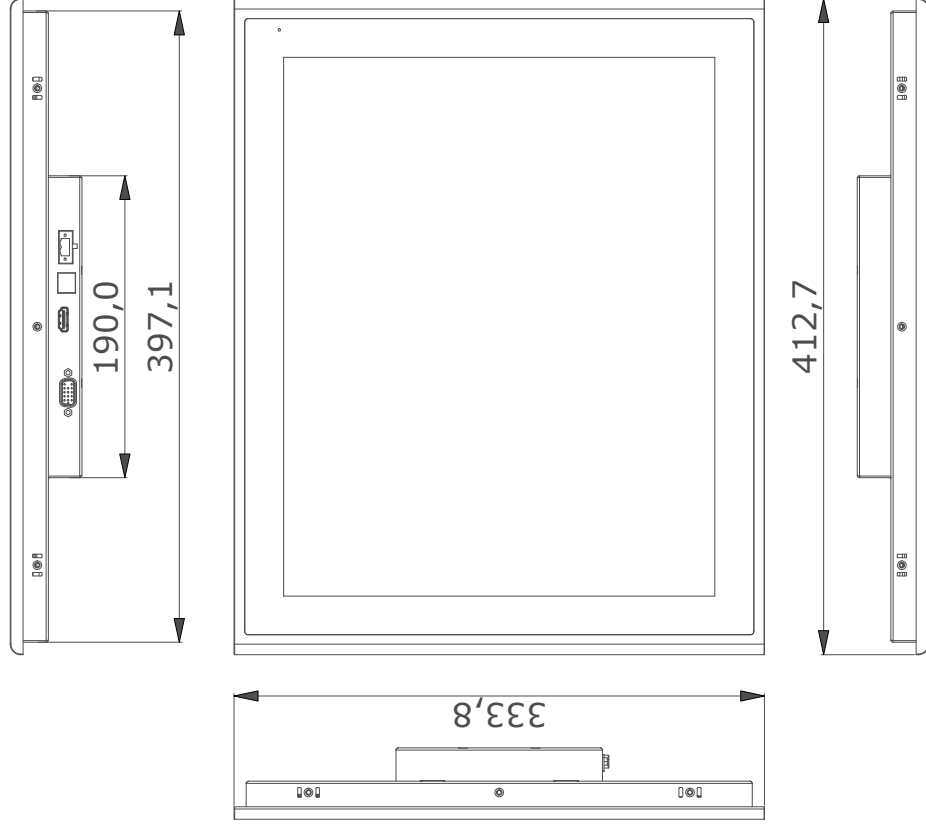


45,0

24,0

190,0

397,1

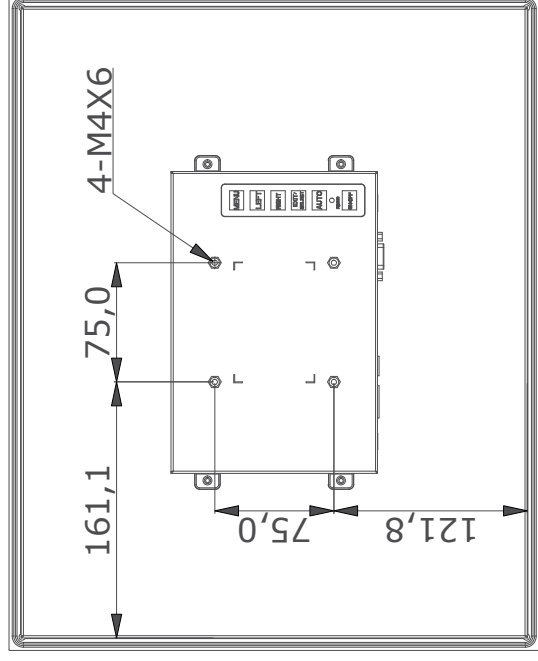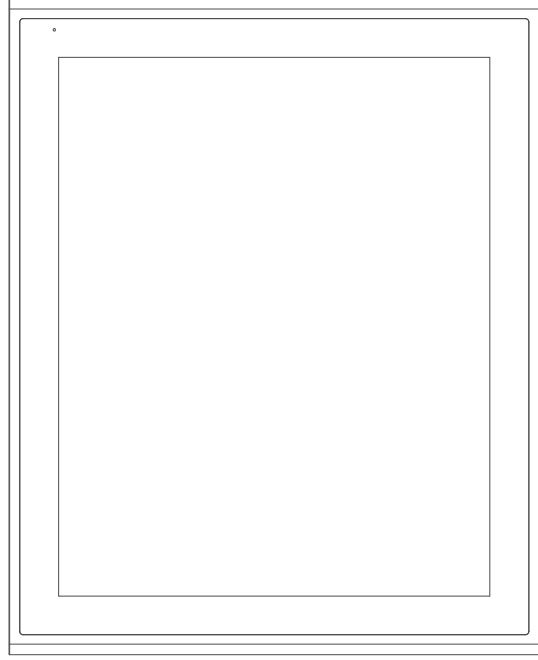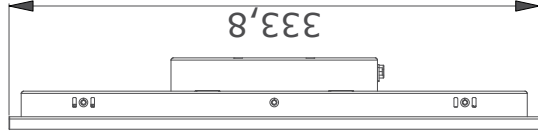

412,7

400,1

开口尺寸  
Mounting Hole Size